

L O F T

D365 Interactive Display




Product Features

- On-board Android 11 Operating System
- 4-Core CPU with 4 GB of RAM and 32 GB storage
- 4K Ultra HD display
- Stereo 16W speakers
- 40-Point IR touch technology
- SGS certified antibacterial and anti-glare display surface
- Compatible with optional Digital Signage and PC modules (OPS Standard)

LOFT

Dimensions

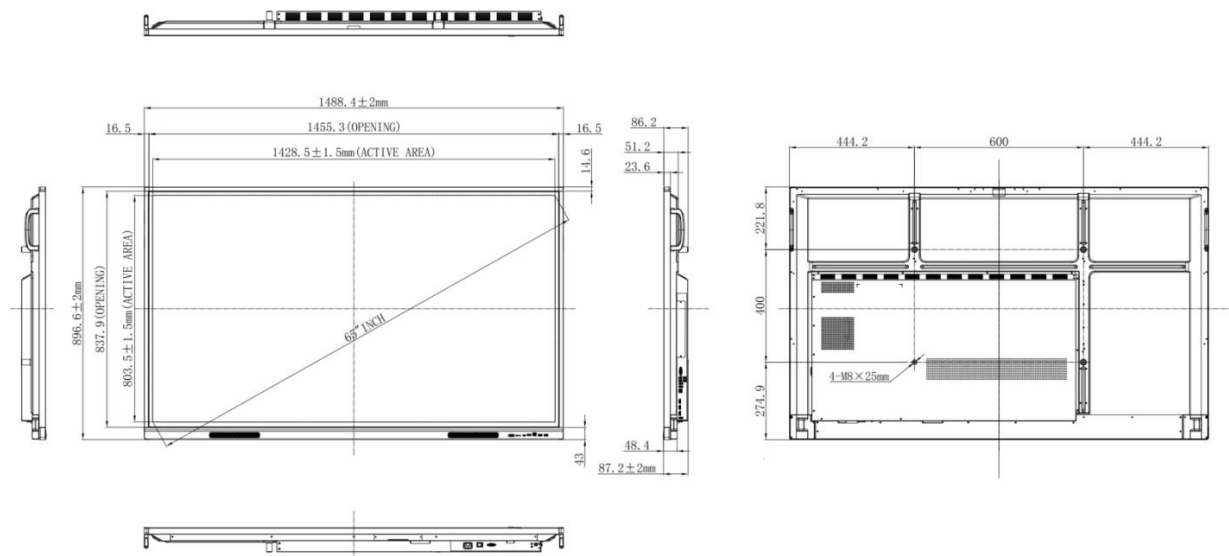

Product Specifications

Display

Size	65 Inches
Screen Type	IPS
Aspect Ratio	16:9
Display Area	1428.48(H)×803.52(V)mm
Resolution	3840x2160 (4K)
Pixel Pitch	0.372x0.372
Back Light Unit	DLED
Response Time	8ms
Refreshing Frequency	60Hz
Display Color	1.07B(10 bit)
Contrast Ratio (Typ)	1200:1
Viewing Angle	178°
Brightness With glass (Typ)	350cd/m ²
Brightness with glass (min)	300cd/m ²
Life Time	>30000 Hours

Video/Audio

Sound Channel	2.0 (Stereo)
Output Power	2x16W

Display Connectors

HDMI IN	3
HDMI Output	1 (via included USB Dongle)
VGA IN	1
Audio Input	1 x 3.5mm
Audio Output	1 x 3.5mm
SPDIF	1
USB 2.0	1
USB 3.0	4
USB Type C	1
USB Touch Output	2 (USB Type B)
RS232	1
LAN(RJ45)	2

Touch System

Sensing Type	Infrared recognition
System	Windows10/Windows8/Windows7/Chrome Windows XP/Linux/Mac OS X/Android
Touch Point	40 simultaneous touch points
Minimum Object Size	3mm
Response Time	≤10ms
Accuracy	<1.5mm
Writing Height	<3mm
Touch Drive	Free drive
Surface Hardness	Toughened Glass Level 7 Mohs Standard
Interpolation Resolution	32767(W)*32767(D)

Android System

System Version	Android 11.0
CPU	Quad core Cortex A55
GPU	Quad core Mali G52
RAM	4 GB
ROM	32 GB

Power

Power Requirements	100- 240V~50/60Hz 5.5A
Typical Power Consumption	200W
Maximum Power Consumption	360W
Standby Power	≤0.5W

Physical Specification

Dimension L*H*D	1488.4 x 896.6 x 87.2 mm
Dimension (package) L*W*H	1628 x 208 x 1005 mm
Wall-hanging Screw Spec	M8*25mm
VESA	800*600mm
Thickness of Display w/ Wall Mount	116.5 mm
Net Weight	34.95 KG
Gross Weight	44.70 KG

Accessories

Standard Power Cord	x1 (3 meters)
USB Cable	x1 (5 meters)
HDMI Cable	x1 (3 meters)
Pens	x2 (SW08)
Remote Control	x1
Battery	x2 (AAA)
Quick Start Guide	x1

Environmental Conditions

Operation Temperature	0 to 40 degrees Celsius
Operation Humidity	10% - 90%RH
Storage Temperature	-20 to 60 degrees Celsius
Storage Humidity	10% - 90%RH
Altitude	Below 5000 meters